



1/4

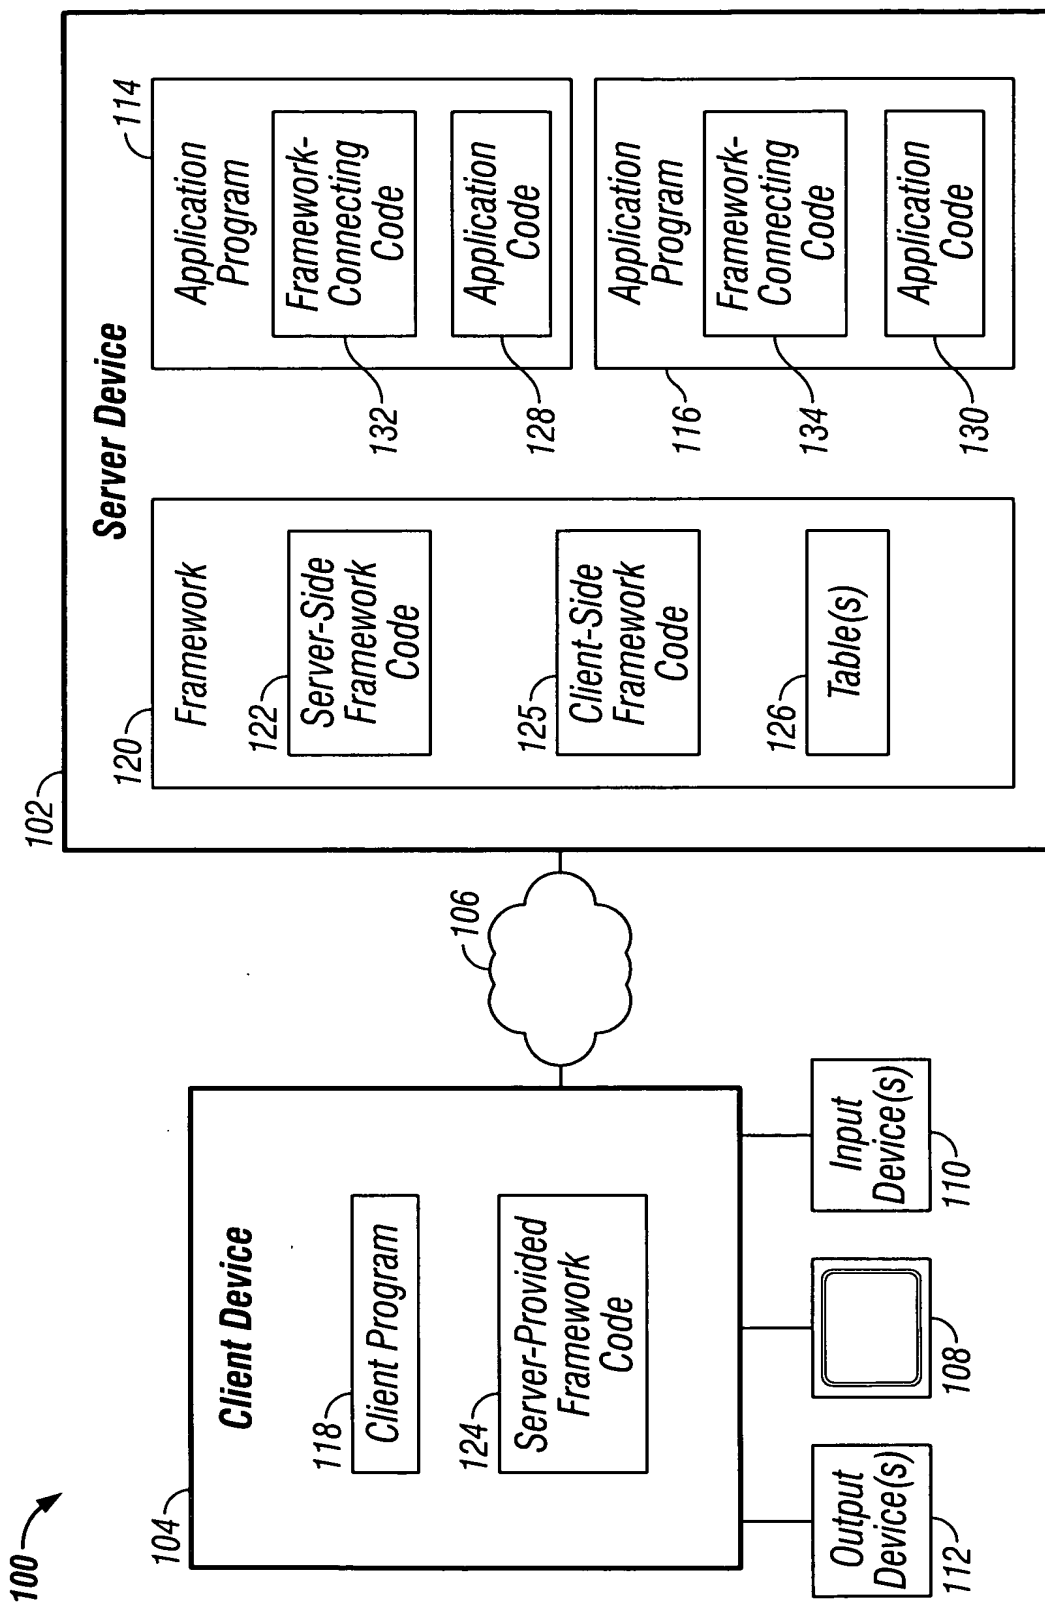


FIG. 1



2/4

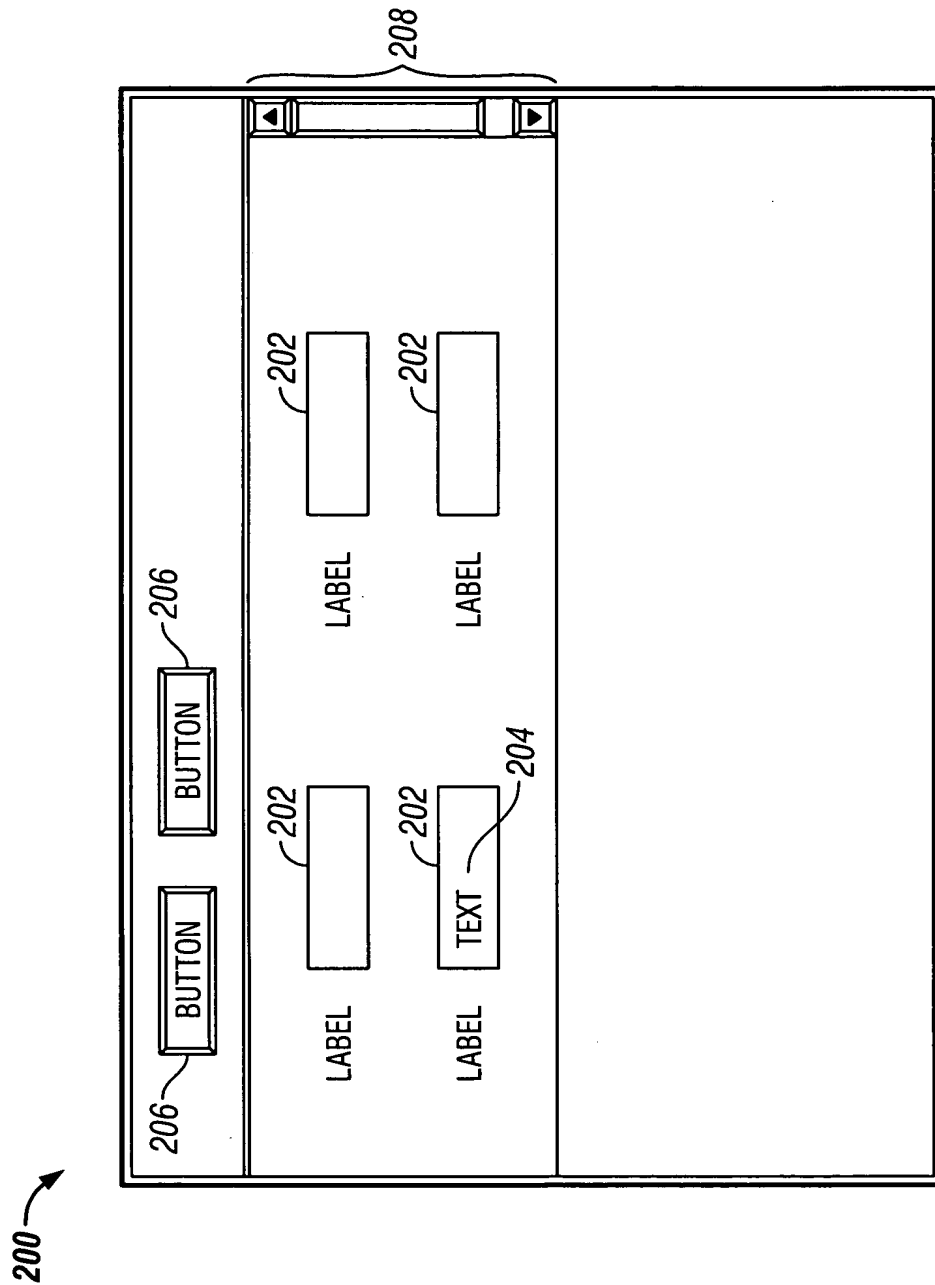


FIG. 2



3/4

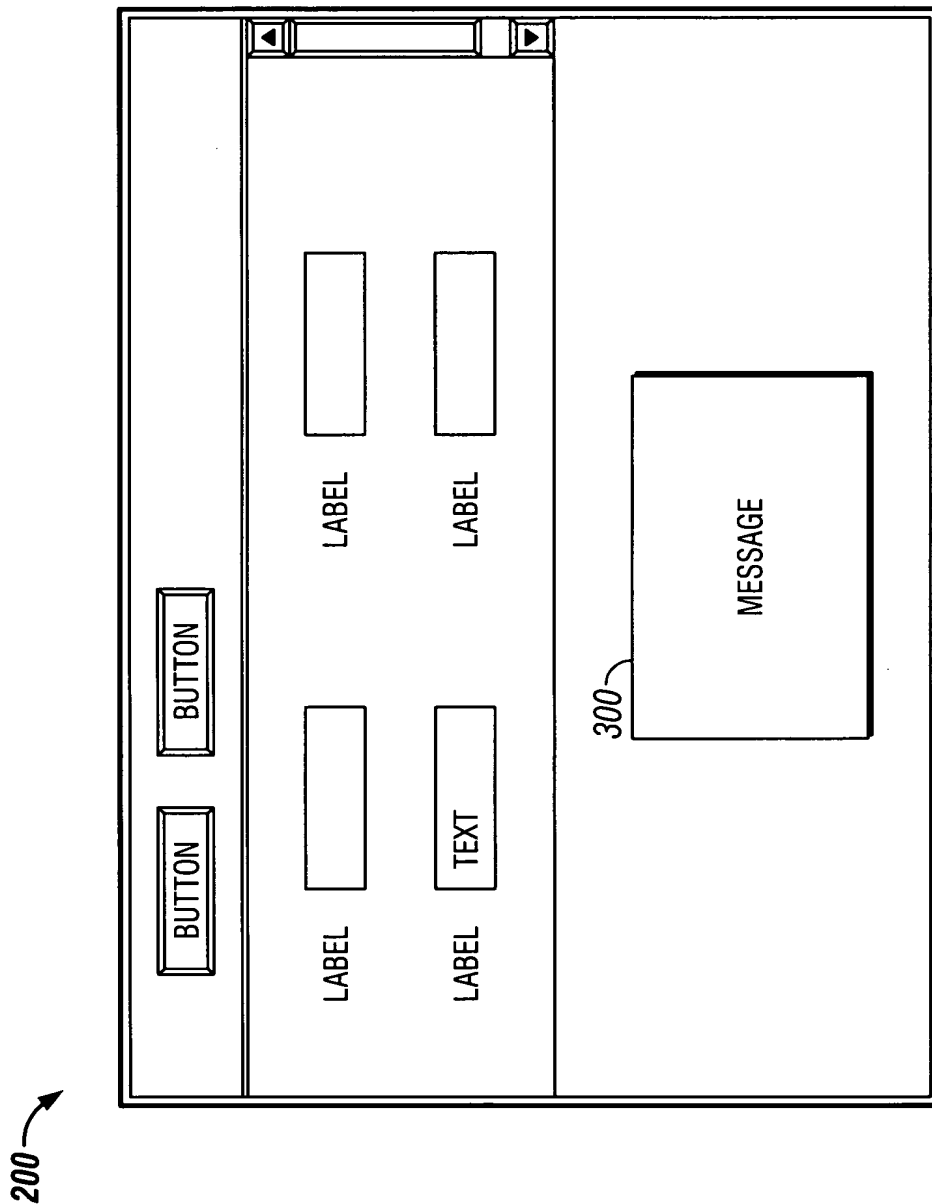


FIG. 3



4/4

400 →

*Provide Executable Code for Input
Blocking and Delayed Message*

500 →

502 →

*Receive Executable Code for Input
Blocking and Delayed Message from
Server Device*

504 →

*Block Client Device from Receiving
User Input During its Communications
with the Server Device*

506 →

*Present Message to User if any of the
Communications Lasts Longer than a
Specific Time*

FIG. 4